

innovating communications

## The Centre Tecnològic de Telecomunicacions de Catalunya

*A gateway to advanced communication technologies*


### SPACE-TIME CODING

Miguel Ángel Lagunas

[m.a.lagunas@cttc.es](mailto:m.a.lagunas@cttc.es)



$$\underline{\underline{B}} \underline{\underline{B}}^H = \underline{\underline{H}} s(n)$$

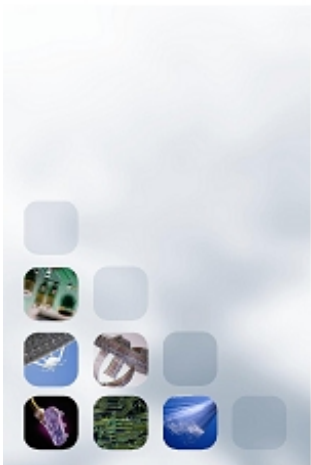

## ***STBC Codes (space-time block)***

For  $R$  input bits, there is an alphabet  $C$  which contains  $2^R$  space time code-words size  $n_T$  by  $n_T$

As stated before, any valid code-word verifies:

$$\underline{\underline{C}} \underline{\underline{C}}^H = \underline{\underline{I}}$$

$=m$   $=m$   $=nT$

Let us assume that the transmitted code-word is  $C_1$  and, assuming ML detection, we would like to compute the probability of error, i.e. decide  $C_0$  when  $C_1$  is the actual word

It will be an error when:

$$Pe(\underline{C}_0 \Rightarrow \underline{C}_1) = \Pr\left(\left| \underline{X}_{Rn} - \underline{HC}_1 \right|_F < \left| \underline{X}_{Rn} - \underline{HC}_0 \right|_F\right)$$

Using that...  $\underline{X}_{Rn} = \sqrt{\frac{2E_s}{N_o}} \underline{HC}_1 + \underline{W}_n = \rho^{0.5} \underline{HC}_1 + \underline{W}_n$

$$\begin{aligned} & \left| \underline{X}_{Rn} - \underline{HC}_1 \right|_F < \left| \underline{X}_{Rn} - \underline{HC}_0 \right|_F \\ & tr\left(\underline{X}_{Rn}^H \underline{H}(\underline{C}_1 - \underline{C}_0) + (\underline{C}_1 - \underline{C}_0)^H \underline{H}^H \underline{X}_{Rn}\right) < 0 \\ & tr\left(\underline{H}(\underline{C}_1 - \underline{C}_0) \underline{C}_1^H \underline{H}^H + \underline{HC}_1(\underline{C}_1 - \underline{C}_0)^H \underline{H}^H\right) < \left(\underline{\tilde{C}} \underline{H}^H + \underline{H} \underline{\tilde{C}}\right) \underline{W}_n \\ & tr\left(\underline{H}\left(2I - \underline{C}_0 \underline{C}_1^H - \underline{C}_1 \underline{C}_0^H\right) \underline{H}^H\right) < tr\left(\left(\underline{\tilde{C}} \underline{H}^H + \underline{H} \underline{\tilde{C}}\right) \underline{W}_n\right) \\ & tr\left(\underline{H} \underline{\tilde{C}} \underline{H}^H\right) < 2tr\left(\left(\underline{H} \underline{\tilde{C}} \underline{H}^H\right) \underline{W}_n\right) \end{aligned}$$

Error when a Gaussian distributed variable surpasses a value equal to its variance divided by 4.



Since.....


$$\text{tr}\left(\underline{\underline{H}} \underline{\underline{\tilde{C}}}_F \underline{\underline{H}}^H\right) = \text{tr}\left(\underline{\underline{H}}^H \underline{\underline{H}} \underline{\underline{\tilde{C}}}_F\right) = \text{tr}\left(\underline{\underline{H}}^H \underline{\underline{H}} (\underline{\underline{C}}_1 - \underline{\underline{C}}_0)^H (\underline{\underline{C}}_1 - \underline{\underline{C}}_0)\right) = \text{tr}\left(\underline{\underline{R}}_H \underline{\underline{A}}\right)$$

In consequence the probability of error will be:.....

$$P_e(\underline{\underline{C}}_0 \Rightarrow \underline{\underline{C}}_1) = Q\left(\sqrt{\frac{2E_s}{N_0} \text{tr}\left(\underline{\underline{R}}_H \underline{\underline{A}}\right)}\right)$$

For moderate and high SNR regimes...

$$P_e(\underline{\underline{C}}_0 \Rightarrow \underline{\underline{C}}_1) = Q\left(\sqrt{\frac{2E_s}{N_0} \text{tr}\left(\underline{\underline{R}}_H \underline{\underline{A}}\right)}\right) \approx k_1 e^{-\frac{E_s}{N_0} \text{tr}\left(\underline{\underline{R}}_H \underline{\underline{A}}\right)}$$

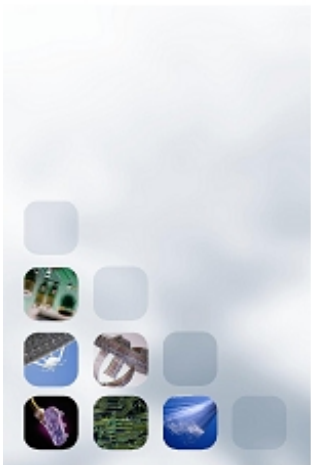




The average probability of error can be obtained from the expected value of the previous one with respect the channel. Assuming the channel Gaussian distributed (No LOS condition), we have.....


$$P_e = E_H \left[ \prod_{p=1}^{n_R} e^{-\frac{E_s}{N_0} \underline{h}_p^H \underline{A} \underline{h}_p} \right] = \prod_{p=1}^{n_R} \int e^{-\frac{E_s}{N_0} \underline{h}_p^H \underline{A} \underline{h}_p} \frac{e^{-\underline{h}_p^H \underline{\Sigma}_p^{-1} \underline{h}_p}}{\det(\underline{\Sigma}_p)} d\underline{h}_p$$



Where vector  $\underline{h}_p$  denotes the channel viewed from antenna  $p$  at the receiver, i.e. channel from the  $n_T$  antennas  $a_t$  Tx to antenna  $p$  at Rx. It is also assumed that antennas are well separated and, in consequence, the  $n_R$  vectors are independent each other.

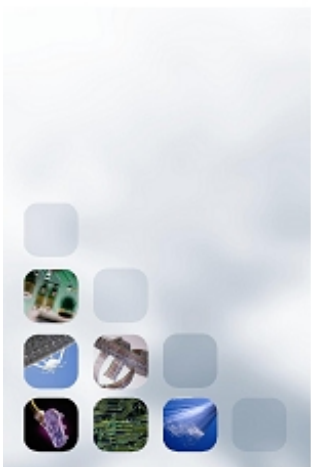

6

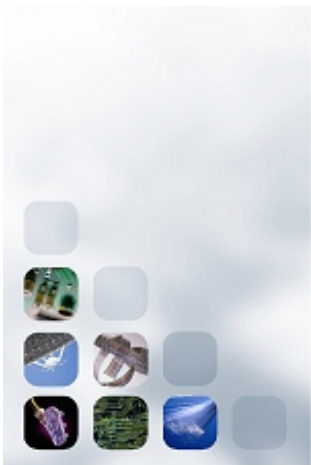

Solving the integral.....
$$P_e = \prod_{p=1}^{n_R} \frac{1}{\det \left( \underset{=nT}{I} + \frac{2E_s}{N_0} \underset{=p}{\Sigma} \underline{\underline{A}} \right)}$$

In addition assuming that all the Rx antennas experience the same variance  $h_0^2$  at moderate and high SNR regimes we can use that

$$P_e \propto \left( \frac{2E_s h_0^2}{N_0} \right)^{-n_T n_R} \left( \det^{1/n_T} (\underline{\underline{A}}) \right)^{-n_T n_R}$$

Thus, the code gain is:

$$\det^{1/n_T} (\underline{\underline{A}})$$

## OSTBC Codes (Multiplexing)

The coder matrix  $\underline{\underline{B}} \cdot \underline{\underline{B}}^H = \underline{\underline{I}}_{n_T}$

The Tx and Rs signals as well as the estimated symbol is:

$$\underline{\underline{X}}_{T,n} = \underline{\underline{B}} \cdot s_1(n)$$

$$\underline{\underline{X}}_{R,n} = \underline{\underline{H}} \cdot \underline{\underline{X}}_{T,n} + \underline{\underline{W}}_n$$

$$s_1 \hat{=} \text{Traza} \left[ \underline{\underline{B}}^H \underline{\underline{H}}^H \cdot \underline{\underline{X}}_{R,n} \right]$$

For  $n_T=2$  there are several possibilities with entries entailing no operation

$$\begin{pmatrix} (1 & 0) & (-1 & 0) & (-1 & 0) & (1 & 0) \\ (0 & 1) & & & & & -1) \\ (0 & 1) & & & & & ) & 1) \\ (1 & 0) & & & & & 1 & 0) \end{pmatrix} \dots$$

Gain 3 dB as code it is more a DSP than a code.????

For two PAM symbols (real) and 2 antennas


$$\underline{\underline{X}}_T = \underline{\underline{B}}_1 .s1 + \underline{\underline{B}}_2 .s2$$

$$\hat{s}1 = \underset{\text{desired}}{\text{Traza}} \left[ \underline{\underline{B}}_1^H . \underline{\underline{R}}_{\underline{\underline{H}}} . \underline{\underline{B}}_1 \right] .s1 + \underset{\text{ISI}}{\text{Traza}} \left[ \underline{\underline{B}}_1^H . \underline{\underline{R}}_{\underline{\underline{H}}} . \underline{\underline{B}}_2 \right] .s2$$


The no-ISI constrain is:

$$\text{Traza} \left[ \underline{\underline{B}}_1^H . \underline{\underline{R}}_{\underline{\underline{H}}} . \underline{\underline{B}}_2 \right] = \text{Traza} \left[ \underline{\underline{R}}_{\underline{\underline{H}}} . \underline{\underline{B}}_2 . \underline{\underline{B}}_1^H \right] = 0 \Rightarrow \underline{\underline{B}}_2 . \underline{\underline{B}}_1^H = \underline{\underline{0}}?$$

Not orthogonal just to be amicable

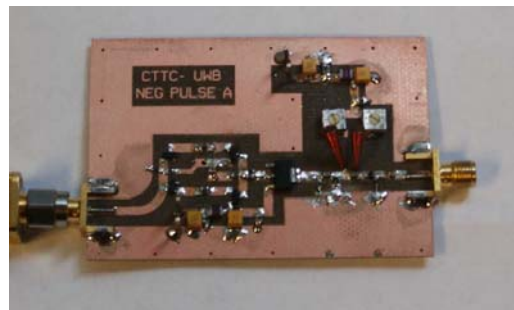

$$\underline{\underline{B}}_1 . \underline{\underline{B}}_2^H = - \underline{\underline{B}}_2 . \underline{\underline{B}}_1^H$$

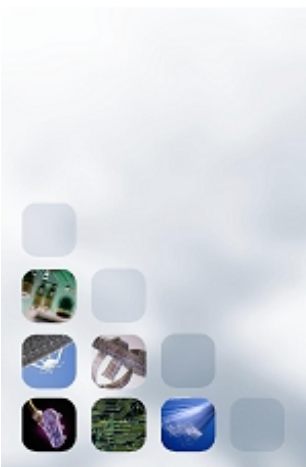



$$\underline{\underline{B}}_1 = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \quad \underline{\underline{B}}_2 = \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix}$$

$$\underline{\underline{X}}_T = \underline{\underline{B}}_1 \cdot s1 + \underline{\underline{B}}_2 \cdot s2 = \begin{pmatrix} s1 & -s2 \\ s2 & s1 \end{pmatrix}$$

To further achieve full-rate, we need two additional matrices, that being amicable in order to detect two imaginary parts, do not promote ISI with the real symbols.


$$\underline{\underline{B}}_1 = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \quad \underline{\underline{B}}_2 = \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix} \quad \underline{\underline{B}}_3 \quad \underline{\underline{B}}_4$$

$$\underline{\underline{X}}_T = \underline{\underline{B}}_1 \cdot s1 + \underline{\underline{B}}_2 \cdot s2 + j \cdot \underline{\underline{B}}_3 \cdot s3 + j \cdot \underline{\underline{B}}_4 \cdot s4$$

$$\underline{\underline{B}}_1 \cdot \underline{\underline{B}}_3^H = \underline{\underline{B}}_3 \cdot \underline{\underline{B}}_1^H$$

$$\underline{\underline{B}}_2 \cdot \underline{\underline{B}}_4^H = \underline{\underline{B}}_4 \cdot \underline{\underline{B}}_2^H$$

It is easy to check that  
this is the constraint---→

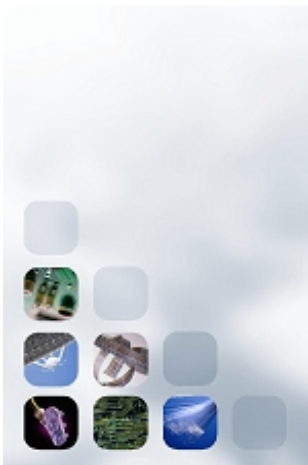

In summary:

$$\begin{aligned} \underline{\underline{B}}_1 \cdot \underline{\underline{B}}_1^H &= \underline{\underline{B}}_2 \cdot \underline{\underline{B}}_2^H = \underline{\underline{B}}_3 \cdot \underline{\underline{B}}_3^H = \underline{\underline{B}}_4 \cdot \underline{\underline{B}}_4^H = \underline{\underline{I}}_2 \\ \underline{\underline{B}}_1 \cdot \underline{\underline{B}}_2^H &= -\underline{\underline{B}}_2 \cdot \underline{\underline{B}}_1^H & \underline{\underline{B}}_4 \cdot \underline{\underline{B}}_3^H &= -\underline{\underline{B}}_3 \cdot \underline{\underline{B}}_4^H \\ \underline{\underline{B}}_1 \cdot \underline{\underline{B}}_3^H &= \underline{\underline{B}}_3 \cdot \underline{\underline{B}}_1^H & \underline{\underline{B}}_2 \cdot \underline{\underline{B}}_4^H &= \underline{\underline{B}}_4 \cdot \underline{\underline{B}}_2^H \end{aligned}$$

The Alamouti's code:

$$\underline{\underline{B}}_1 = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \quad \underline{\underline{B}}_2 = \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix} \quad \underline{\underline{B}}_3 = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix} \quad \underline{\underline{B}}_4 = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}$$

$$\underline{\underline{X}}_T = \underline{\underline{B}}_1 \cdot s_1 + \underline{\underline{B}}_2 \cdot s_2 + \underline{\underline{B}}_3 \cdot j \cdot s_3 + \underline{\underline{B}}_4 \cdot j \cdot s_4 = \begin{pmatrix} s_1 + j \cdot s_3 & -s_2 + j \cdot s_4 \\ s_2 + j \cdot s_4 & s_1 - j \cdot s_3 \end{pmatrix} = \begin{pmatrix} z_1 & -z_2^* \\ z_2 & z_1^* \end{pmatrix}$$


The receiver----->

$$\hat{s}_1 = \text{Re} \left( \text{Traza} \left[ \underline{\underline{B}}_1^H \cdot \underline{\underline{R}}_{\underline{\underline{H}}} \cdot \underline{\underline{X}}_R \right] \right)$$

$$\hat{s}_2 = \text{Re} \left( \text{Traza} \left[ \underline{\underline{B}}_2^H \cdot \underline{\underline{R}}_{\underline{\underline{H}}} \cdot \underline{\underline{X}}_R \right] \right)$$

$$\hat{s}_3 = \text{Im} \left( \text{Traza} \left[ \underline{\underline{B}}_1^H \cdot \underline{\underline{R}}_{\underline{\underline{H}}} \cdot \underline{\underline{X}}_R \right] \right)$$

$$\hat{s}_4 = \text{Im} \left( \text{Traza} \left[ \underline{\underline{B}}_2^H \cdot \underline{\underline{R}}_{\underline{\underline{H}}} \cdot \underline{\underline{X}}_R \right] \right)$$

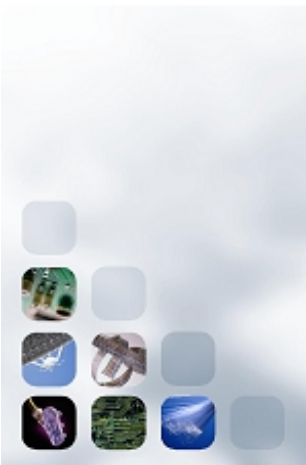

Unfortunately no such full-rate codes exist for any number of antennas. There are solution for rates lower than one like the code shown below for 4 antennas and rate  $\frac{3}{4}$ .

$$\begin{bmatrix} s1 & 0 & s2 & -s3 \\ 0 & s1 & s3^* & s2^* \\ -s2^* & -s3 & s1^* & 0 \\ s3^* & -s2 & 0 & s1^* \end{bmatrix}$$



## Convolutional S-T Codes: Trellis codes

output      input      state

$$\underline{x} = \left[ \underline{G}_1 \cdot \underline{a} + \underline{G}_2 \cdot \underline{b} \right]^{\square}$$

Measurement equation

$$\underline{b} = \left[ \underline{G}_3 \cdot \underline{a} + \underline{G}_4 \cdot \underline{b} \right]^{\oplus}$$

State equation

$\underline{a} = [a(1), a(2), \dots, a(R)]^T$  input bits

L bits per component output  $\underline{x}$

L=2 bits Components

0(00), 1(01), 2(10), 3(11) that  
correspond to the four signals  
in a QPSK constellation

Code rate =  $R/L$  over  $n_T$  antennas



K bits for M components of the state vector  $\underline{b}$





## Code specification:

- Number of Tx antennas  $n_T$
- Bits/Hz or size of the radiated constellation  $L$
- Complexity at Tx or number of states  $2^{K.M}$
- Code Rate equal to  $R/L$

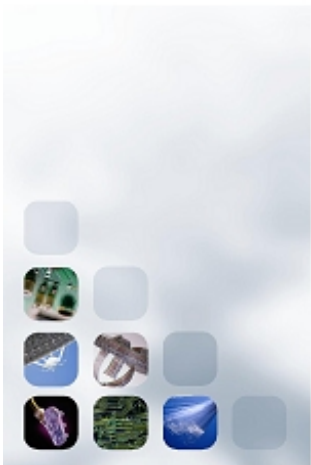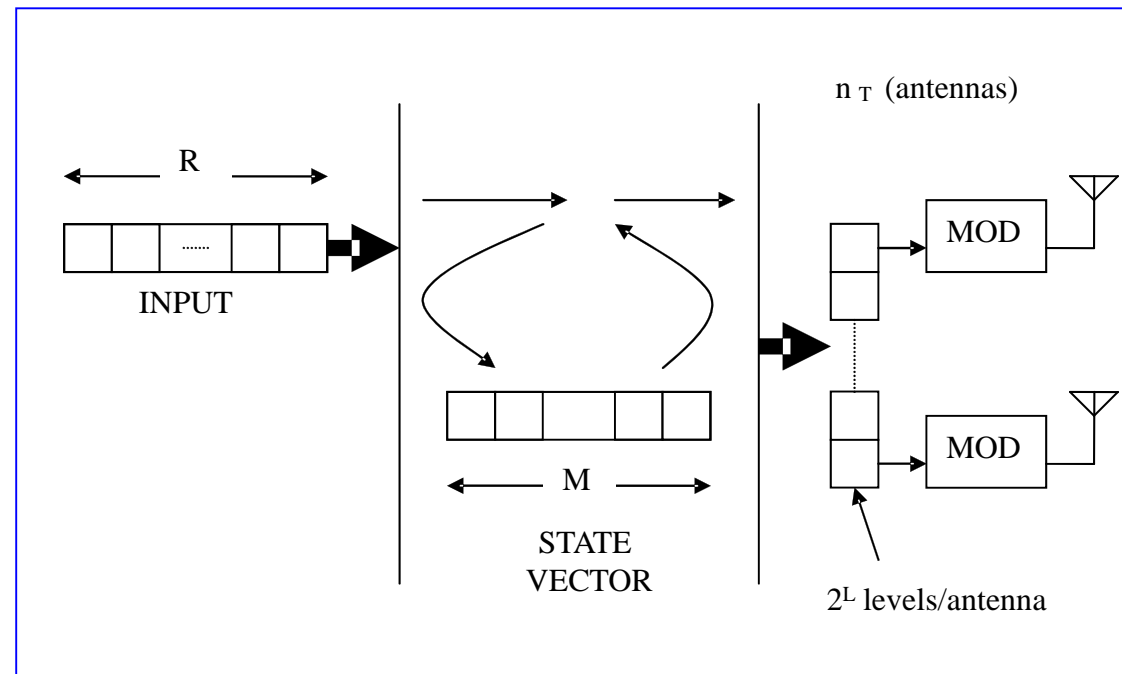


*A more compact formulation of the state model is:*

Grouping input and state vectors in a single one

$$\underline{c} = [a(1) \quad \dots \quad a(R) \quad b(1) \quad \dots \quad b(M)]$$

$$\underline{x} = \left[ \underline{\underline{G}} \cdot \underline{c} \right]^{\oplus}$$



And, the state vector is formed by the last M bits after a shift of a given number of components vector  $\underline{c}$  from left to right



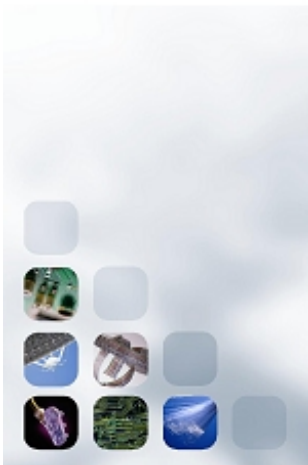


## Code *st2bh2est4rate1*: (binary codes)


$$[a(1) \ a(2) \ b(1) \ b(2)] \cdot \begin{bmatrix} 0 & 2 \\ 0 & 1 \\ 2 & 0 \\ 1 & 0 \end{bmatrix} = [x1 \ x2]$$

Modul 2  
operation for  
x1 and x2

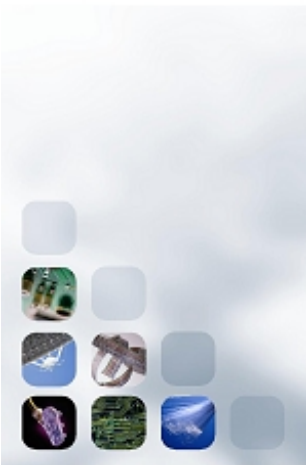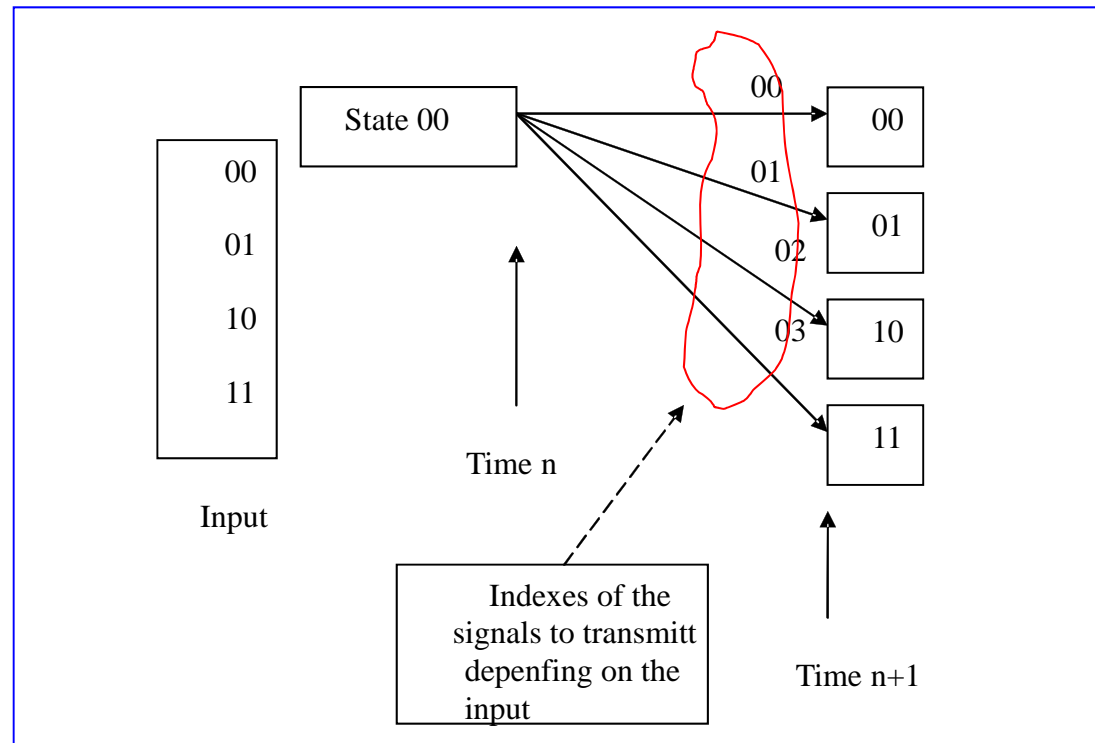

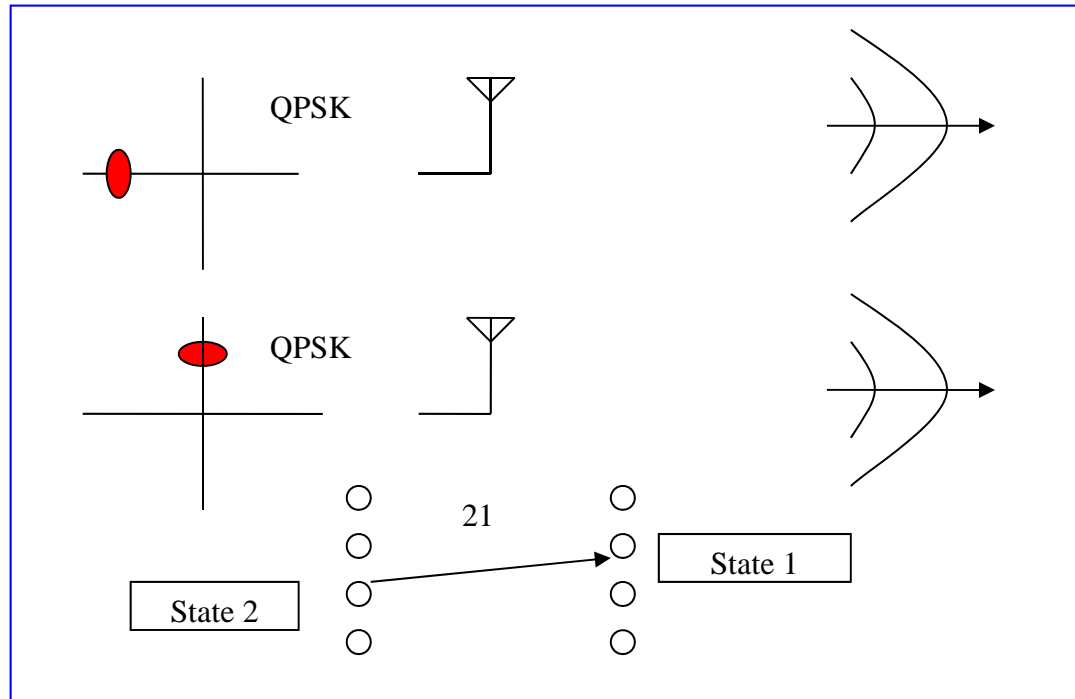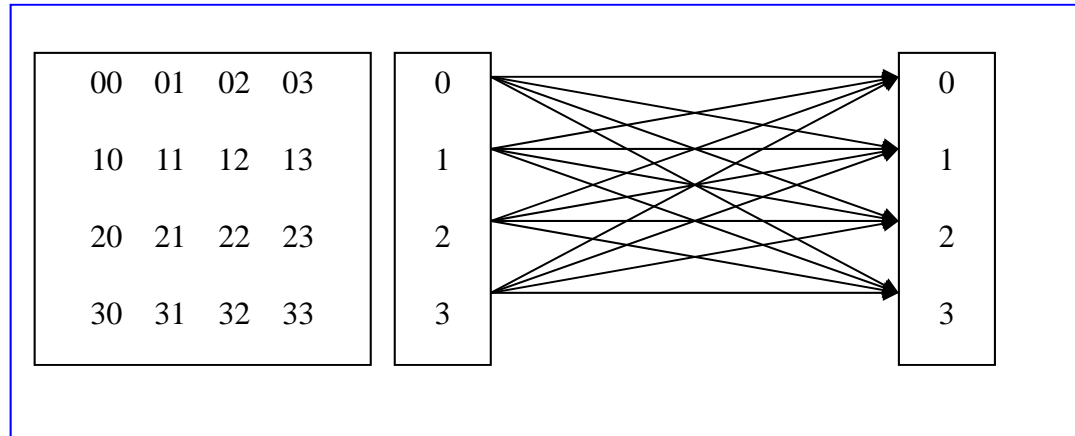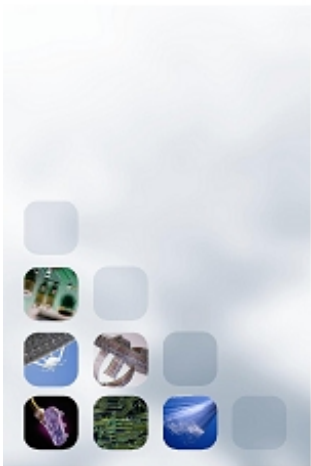



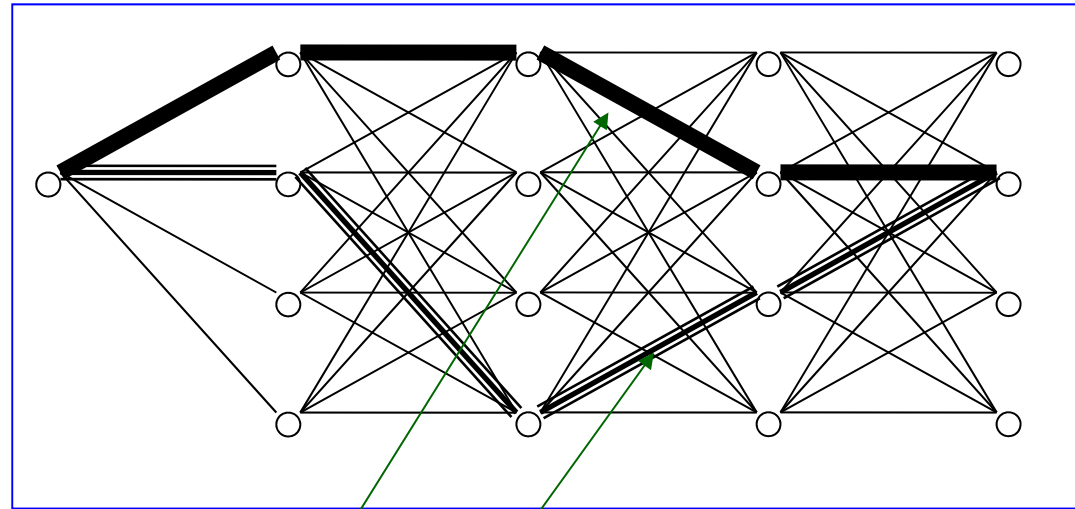

For uniform code any two pair is good. Use the  $(0,0,0,0,0\dots)$  as reference.

Search for the lowest distance covered to recover the zero path (This will be the worst matrix  $A$  to be used in the BER upper bound)

$$\Pr(\underline{s}_n \Rightarrow \underline{b}_n; n = 1, N) = Q \left( \sqrt{\left( \frac{E_s}{2.N_0} \right) \cdot \text{Traza}(\underline{R}_H \cdot \underline{A})} \right)$$

For a length of  $N$  channels access

$$\underline{\underline{A}} = \sum_{n=1}^N (\underline{s}_n - \underline{b}_n) \cdot (\underline{s}_n - \underline{b}_n)^H$$


And the average BER

$$P_e = E_H \left[ \prod_{p=1}^{n_R} e^{-\frac{E_s}{N_0} \underline{h}_p^H \underline{\underline{A}} \underline{h}_p} \right] = \prod_{p=1}^{n_R} \int e^{-\frac{E_s}{N_0} \underline{h}_p^H \underline{\underline{A}} \underline{h}_p} \frac{e^{-\underline{h}_p^H \underline{\Sigma}_p^{-1} \underline{h}_p}}{\det(\underline{\Sigma}_p)} d\underline{h}_p$$

$$\Pr(\underline{I}_0 \Rightarrow \underline{I}_e) \approx k_1 \cdot \prod_{p=1}^{n_R} \frac{1}{\det \left[ \underline{I}_{=n_T} + \frac{2E_s}{N_0} \cdot \underline{\underline{A}} \cdot \underline{\Sigma}_{=p} \right]} \approx$$

For moderate and high SNRs

$$\approx k_1 \cdot \left( \frac{2E_s}{N_0} \right)^{-n_R \cdot n_T} \cdot \prod_{p=1}^{n_R} \frac{1}{\det \left[ \underline{\underline{A}} \cdot \underline{\Sigma}_{=p} \right]}$$


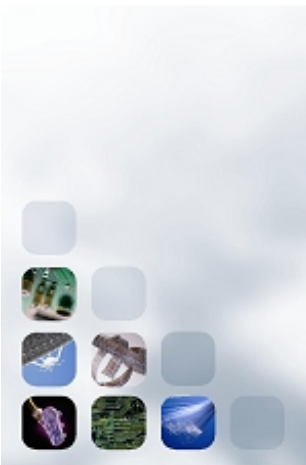




or



$$\Pr(\underline{I}_0 \Rightarrow \underline{I}_e) \approx k_1 \cdot \left( \frac{2E_S}{N_0} \right)^{-n_R \cdot n_T} \cdot \prod_{p=1}^{n_R} \frac{1}{\det[\underline{\underline{A}} \cdot \underline{\underline{\Sigma}}_p]} \approx k_2 \cdot \left( \frac{2E_S}{N_0} \right)^{-n_R \cdot n_T} \cdot \left( \det(\underline{\underline{A}}) \right)^{-n_R}$$

$$\text{Code Gain} = \left[ \det(\underline{\underline{A}})^{1/n_T} \right]$$

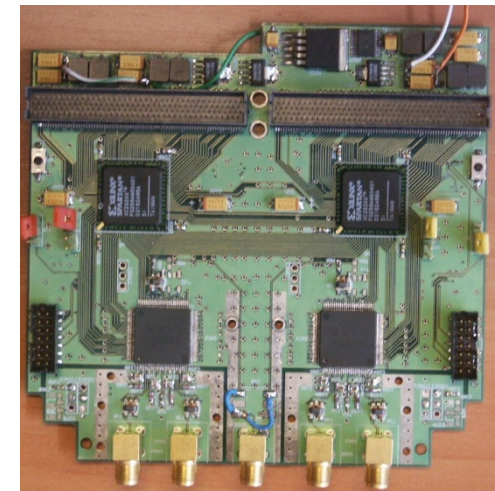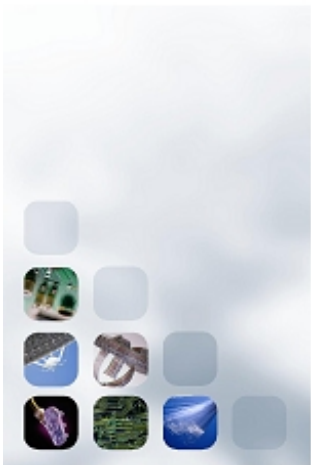

For  $st2bh1est2rate0.5$


$$\underline{\underline{G}} = \begin{pmatrix} 1 & 1 \\ 0 & 1 \end{pmatrix}$$

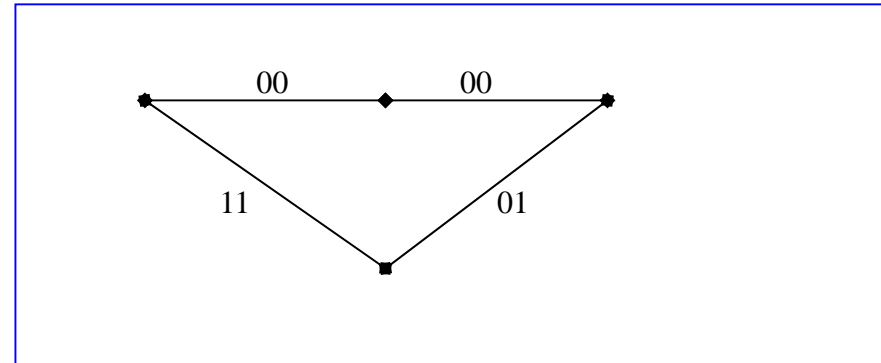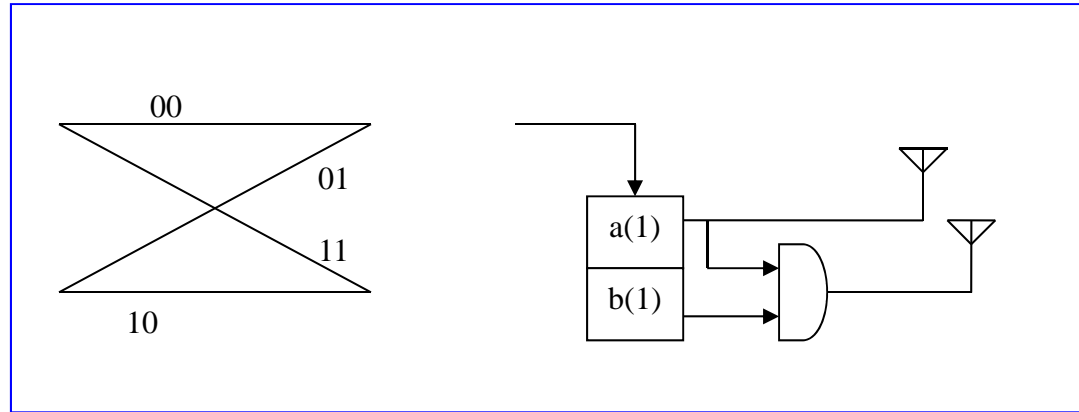


$$\underline{s}_1 - \underline{b}_1 = \begin{bmatrix} 2 \\ 2 \end{bmatrix} \quad y \quad \underline{s}_2 - \underline{b}_2 = \begin{bmatrix} 0 \\ 2 \end{bmatrix}$$

$$\underline{\underline{A}} = \begin{bmatrix} 2 \\ 2 \end{bmatrix} \cdot [2 \quad 2] + \begin{bmatrix} 0 \\ 2 \end{bmatrix} \cdot [0 \quad 2] = \begin{pmatrix} 4 & 4 \\ 4 & 4 \end{pmatrix} + \begin{pmatrix} 0 & 0 \\ 0 & 4 \end{pmatrix} = \begin{pmatrix} 4 & 4 \\ 4 & 8 \end{pmatrix}$$

$$\det(\underline{\underline{A}}) = 16 \quad \text{Ganancia} = \sqrt{16} = 4$$

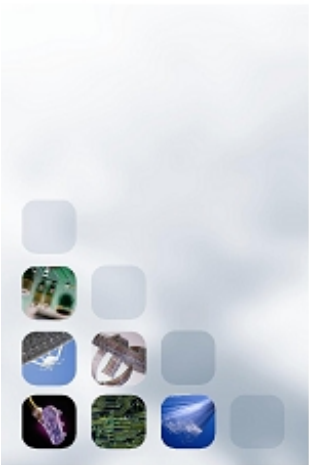

St2bh2est8	Gain $\sqrt{22}$	$\ G^T\  = \begin{bmatrix} 0 & 2 & 1 & 0 & 2 \\ 2 & 1 & 0 & 2 & 2 \end{bmatrix}$
St2bh2est16	Gain $\sqrt{32}$	$\ G^T\  = \begin{bmatrix} 0 & 2 & 1 & 1 & 2 & 0 \\ 2 & 2 & 1 & 2 & 0 & 2 \end{bmatrix}$
St2bh1est2	Gain 4	$\ G^T\  = \begin{bmatrix} 0 & 1 \\ 1 & 1 \end{bmatrix}$
St2bh1est4	Gain $\sqrt{48}$	$\ G^T\  = \begin{bmatrix} 0 & 2 & 1 & 0 & 2 \\ 2 & 1 & 0 & 2 & 2 \end{bmatrix}$
St2bh1est8	Gain $\sqrt{80}$	$\ G^T\  = \begin{bmatrix} 1 & 0 & 1 & 1 \\ 1 & 1 & 0 & 1 \end{bmatrix}$
St2bh1est16	Gain $\sqrt{128}$	$\ G^T\  = \begin{bmatrix} 0 & 1 & 0 & 1 & 1 \\ 1 & 0 & 1 & 0 & 1 \end{bmatrix}$
St3bh1est8	Gain $\sqrt[3]{256}$	$\ G^T\  = \begin{bmatrix} 1 & 0 & 0 & 1 \\ 1 & 0 & 1 & 0 \\ 1 & 1 & 1 & 1 \end{bmatrix}$

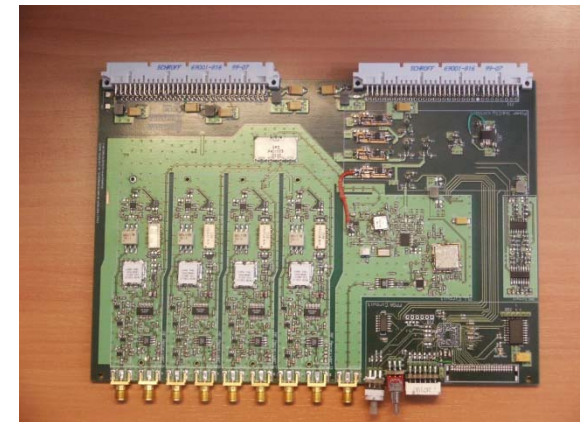

## Codes for No-CSI at Rx

Assume that  $\log_2 M$  bits have to be transmitted using  $N$  access to the channel with  $n_T$  antennas. We will use  $M$  matrixes of  $n_T$  by  $N$

$$\underline{\underline{C}}_m \quad m = 1, M$$

UPA at Tx

$$\underline{\underline{C}}_m . \underline{\underline{C}}_m^H = \underline{\underline{I}}_{n_T} \quad \forall m = 1, M$$

H matrix is random  $\rightarrow$  Average BER

$$\text{At Rx} \rightarrow \underline{\underline{Y}}_R = \left( \frac{2E_s}{N_0} \right)^{1/2} \underline{\underline{H}} . \underline{\underline{C}}_0 + \underline{\underline{W}} = \rho^{1/2} \underline{\underline{H}} . \underline{\underline{C}}_0 + \underline{\underline{W}}$$

$$\underline{\underline{\Sigma}} = E \left[ \underline{\underline{Y}}_R^H \cdot \underline{\underline{Y}}_R \right] = \underline{\underline{I}} + \underline{\underline{C}}_0^H \cdot E \left[ \underline{\underline{H}}^H \cdot \underline{\underline{H}} \right] \cdot \underline{\underline{C}}_0 = \underline{\underline{I}} + \rho \cdot \underline{\underline{C}}_0^H \cdot \underline{\underline{R}}_{HA} \cdot \underline{\underline{C}}_0 = \underline{\underline{I}} + \rho |H_0|^2 \cdot \underline{\underline{C}}_0^H \cdot \underline{\underline{C}}_0$$


The ML receiver is:

$$\begin{aligned} \Pr \left( \underline{\underline{Y}}_R / \underline{\underline{C}}_0 \right) &= k_0 \cdot \exp - \left[ \text{Traza} \left( \underline{\underline{Y}} \cdot \underline{\underline{\Sigma}}^{-1} \cdot \underline{\underline{Y}}^H \right) \right] = \\ &= k_0 \cdot \exp - \left[ \text{Traza} \left( \underline{\underline{Y}} \cdot \left( \underline{\underline{I}} - \rho \cdot \underline{\underline{C}}_0^H \cdot \underline{\underline{C}}_0 \right) \cdot \underline{\underline{Y}}^H \right) \right] \end{aligned}$$

$$\hat{m} = \arg \max_{\underline{\underline{C}}_m, m=1, M} \left[ \text{Traza} \left( \underline{\underline{Y}}_R \cdot \underline{\underline{C}}_m^H \cdot \underline{\underline{C}}_m \cdot \underline{\underline{Y}}_R^H \right) \right]$$

Perfect detection occurs when:

$$\text{Traza} \left( \underline{\underline{Y}}_R \cdot \underline{\underline{C}}_0^H \cdot \underline{\underline{C}}_0 \cdot \underline{\underline{Y}}_R^H \right) > \text{Traza} \left( \underline{\underline{Y}}_R \cdot \underline{\underline{C}}_1^H \cdot \underline{\underline{C}}_1 \cdot \underline{\underline{Y}}_R^H \right)$$

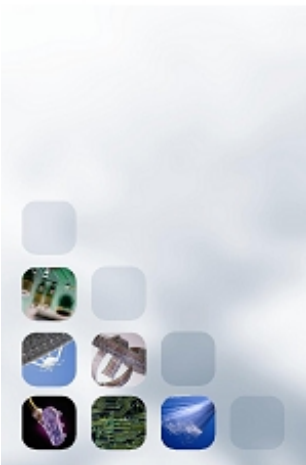

$$\rho \cdot \text{Traza} \left[ \underline{\underline{H}} \cdot \left( \underline{\underline{I}} - \underline{\underline{C}}_0 \cdot \underline{\underline{C}}_1^H \cdot \underline{\underline{C}}_1 \cdot \underline{\underline{C}}_0^H \right) \cdot \underline{\underline{H}}^H \right] > 2\rho^{1/2} \cdot \text{Re} \left\{ \text{Traza} \left[ \underline{\underline{W}} \cdot \left( \underline{\underline{C}}_0^H \cdot \underline{\underline{C}}_0 - \underline{\underline{C}}_1^H \cdot \underline{\underline{C}}_1 \right) \cdot \underline{\underline{C}}_0^H \cdot \underline{\underline{H}}^H \right] \right\}$$

$$\Pr \left( \underline{\underline{C}}_0 \rightarrow \underline{\underline{C}}_1 \right) \approx Q \left( \sqrt{\left( \frac{2E_s}{N_0} \right) \cdot \text{Traza} \left( \underline{\underline{H}} \cdot \underline{\underline{A}}_{NOCSI} \cdot \underline{\underline{H}}^H \right)} \right) \approx$$

$$\approx k_1 \cdot \exp \left[ - \left( \left( \frac{2E_s}{N_0} \right) \cdot \text{Traza} \left( \underline{\underline{H}} \cdot \underline{\underline{A}}_{NOCSI} \cdot \underline{\underline{H}}^H \right) \right) \right]$$


$$\Pr^{AVE} \approx k_2 \cdot \prod_{p=1}^{n_R} \frac{1}{\det \left[ \underline{\underline{I}} - \left( \frac{E_s}{2 \cdot N_0} \right) \underline{\underline{A}}_{NOCSI} \cdot \underline{\underline{\Sigma}}_p \right]}$$

$$E_s = \left( \frac{N}{n_T} \right) \cdot E_T$$

It is important to remark the loss due to the absence of CSI at Rx

$$\underline{\underline{A}}_{CSI} = \left( \underline{\underline{C}}_0 - \underline{\underline{C}}_1 \right) \left( \underline{\underline{C}}_0 - \underline{\underline{C}}_1 \right)^H$$

$$\underline{\underline{A}}_{NOCSI} = \underline{\underline{I}} - \underline{\underline{C}}_0 \cdot \underline{\underline{C}}_1^H \cdot \underline{\underline{C}}_1 \cdot \underline{\underline{C}}_0^H$$

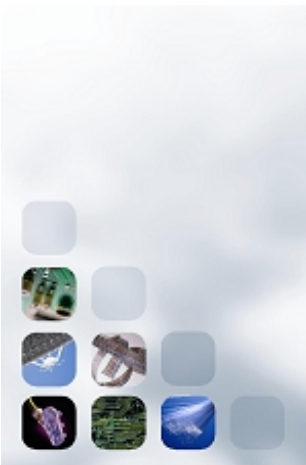




In order to compare both cases, note that:


$$\left| \underline{I} - \underline{C}_{\underline{0}} \cdot \underline{C}_{\underline{1}}^H \right|^2 = \underline{I} + \underline{C}_{\underline{0}} \cdot \underline{C}_{\underline{1}}^H \underline{C}_{\underline{1}} \cdot \underline{C}_{\underline{0}}^H - \underline{C}_{\underline{0}} \cdot \underline{C}_{\underline{1}}^H - \underline{C}_{\underline{1}} \cdot \underline{C}_{\underline{0}}^H =$$

$$2 \cdot \underline{I} - \underline{C}_{\underline{0}} \cdot \underline{C}_{\underline{1}}^H - \underline{C}_{\underline{1}} \cdot \underline{C}_{\underline{0}}^H - \underline{A}_{NOCSI} = \underline{A}_{CSI} - \underline{A}_{NOCSI}$$

Asi pues,

$$\underline{A}_{CSI} = \underline{A}_{NOCSI} + \left| \underline{I} - \underline{C}_{\underline{0}} \cdot \underline{C}_{\underline{1}}^H \right|^2$$

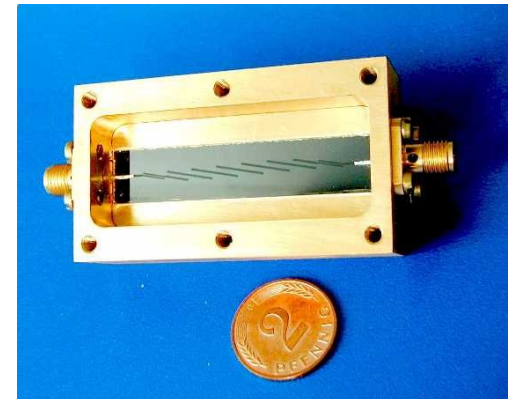

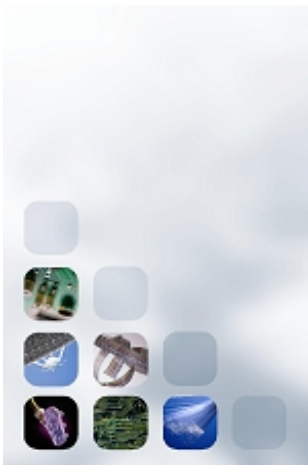

## Codigos ST Diferenciales

Assuming that there is CSI at Rx

$$\left| \underline{X}_R - E_s^{1/2} \cdot \underline{H} \cdot \underline{C}_m \right|_F \Rightarrow \hat{\underline{C}} = \underset{\underline{C}_m; m=1, M}{\text{Max}} \left[ \text{Re} \left( \text{Traza} \left( \underline{H} \cdot \underline{C}_m \cdot \underline{X}_R \right) \right) \right]$$




The probability of error is:


$$Pe = \Pr \left( \underline{C}_m \rightarrow \underline{C}_n; \tilde{\underline{C}} \equiv \underline{C}_m - \underline{C}_n \right) = k_0 \cdot Q \left( \sqrt{\frac{E_s}{2 \cdot N_0} \cdot \text{Traza} \left( \underline{R}_H \cdot \tilde{\underline{C}} \cdot \tilde{\underline{C}}^H \right)} \right)$$

$$Pe \approx k_1 \cdot \exp \left[ -\frac{E_s}{4 \cdot N_0} \cdot \text{Traza} \left( \underline{R}_H \cdot \tilde{\underline{C}} \cdot \tilde{\underline{C}}^H \right) \right] = k_1 \cdot \exp \left[ -\frac{E_s}{4 \cdot N_0} \cdot \sum_{p=1}^{n_R} h_p^H \cdot \tilde{\underline{C}} \cdot \tilde{\underline{C}}^H \cdot h_p \right]$$


$$Pe^{aver} = k_2 \cdot \prod_{p=1}^{n_R} \frac{1}{\det \left[ \underline{I} + \frac{E_s}{4 \cdot N_0} \cdot \tilde{\underline{C}} \cdot \tilde{\underline{C}}^H \cdot \underline{\Sigma}_j \right]}$$

*Using two symbols first estimate the channel second to decode.*

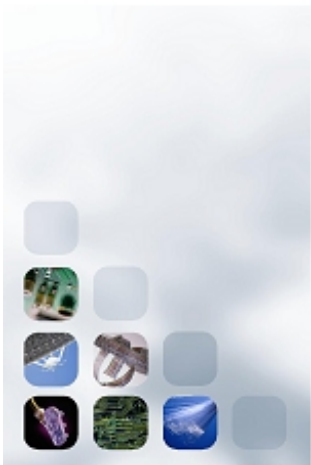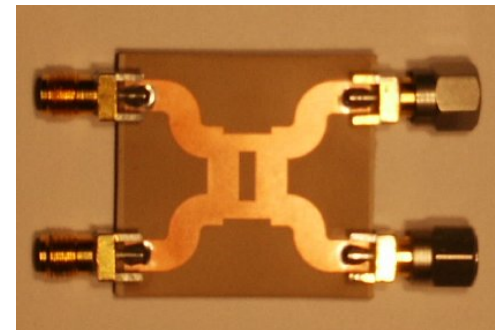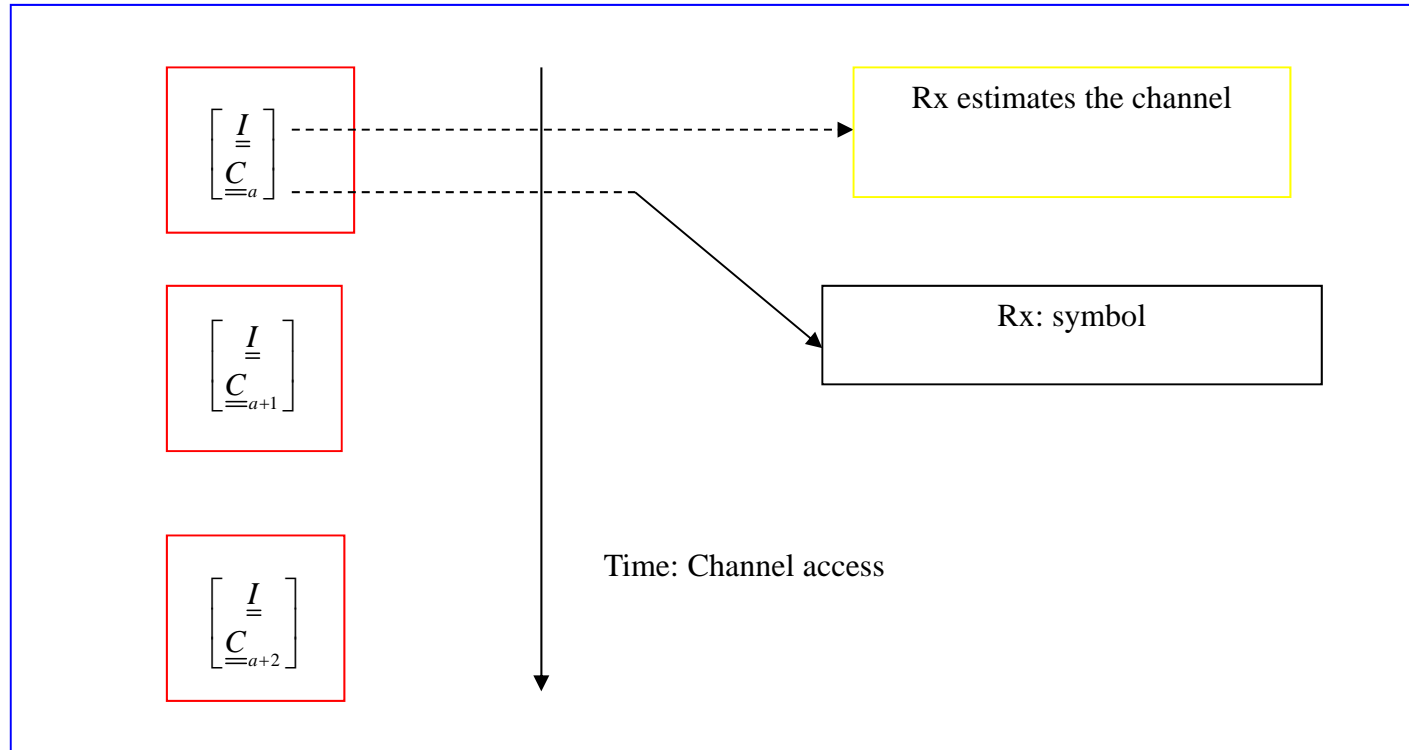

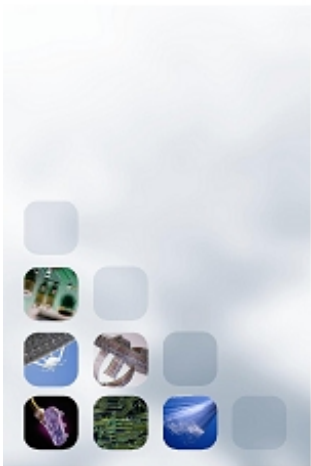

## The differential receiver

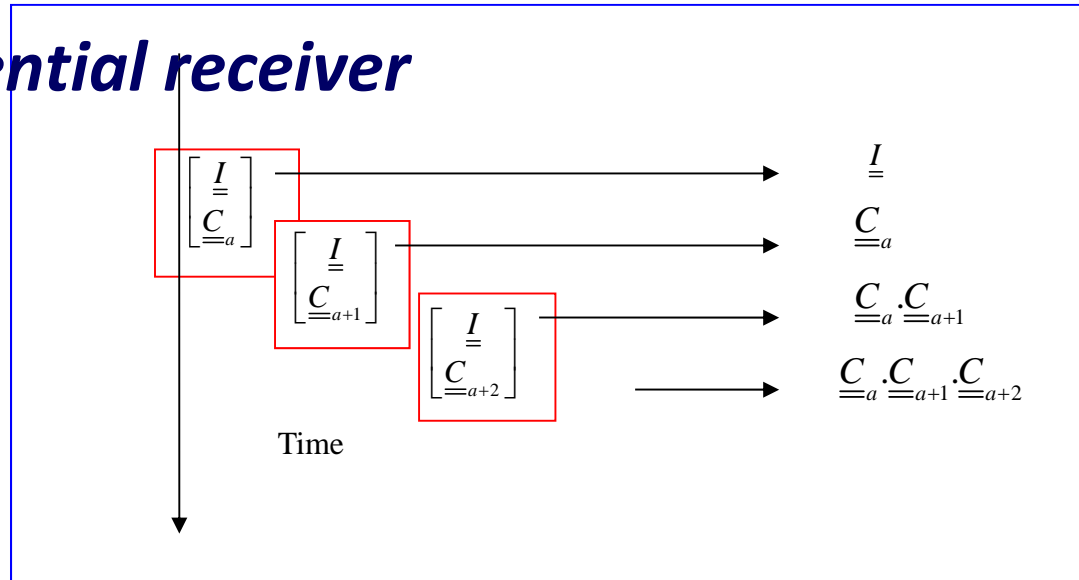


The desired word

received is 
$$Z_{n-1} = \prod_{a=1} C_{n-a}$$

And the received snapshot

$$X_{R,n-1} = H \cdot Z_{n-1} + W_{n-1}$$

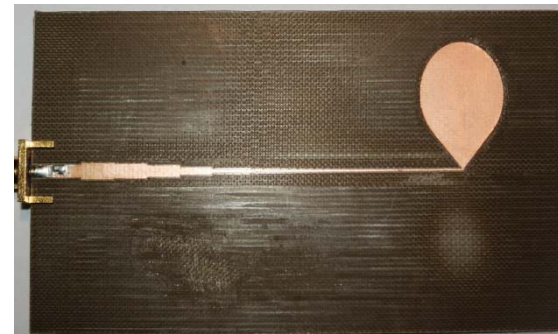


Hereafter it is shown that the ST code produces, in fact, a new channel together with 3 dB. increase of noise.

$$\underline{X}_{R,n} = \underline{H} \cdot \underline{Z}_{n-1} \cdot \underline{C}_n + \underline{W}_n = \left( \underline{X}_{R,n-1} - \underline{W}_{n-1} \right) \cdot \underline{C}_n + \underline{W}_n$$

$$\underline{X}_{R,n} = \underline{X}_{R,n-1} \cdot \underline{C}_n + \left( \underline{W}_n - \underline{W}_{n-1} \cdot \underline{C}_n \right) = \underline{H}_{nuevo} \cdot \underline{C}_n + \underline{W}_{nuevo}$$

Regardless the system is full-rate the decoder requires of two received codewords

$$\left| \underline{X}_{R,n} - \underline{X}_{R,n-1} \cdot \underline{C}_n \right|_F \Rightarrow \hat{\underline{C}}_n = \underset{\underline{C}_n; n=1, M}{Max} \left[ \text{Re} \left( \text{Traza} \left( \underline{X}_{R,n-1} \cdot \underline{C}_n \cdot \underline{X}_{R,n}^H \right) \right) \right]$$

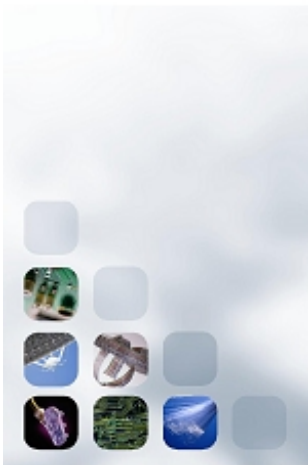

Also, the matrix  $\underline{A}$  for the average BER is as follows:

$$\begin{aligned}
 & 2 \underline{I} - \left( \underline{Z}_{k-1} \cdot \underline{C}_{\underline{0}} \cdot \underline{C}_{\underline{1}}^H \cdot \underline{Z}_{k-1}^H + \underline{Z}_{k-1} \cdot \underline{C}_{\underline{1}} \cdot \underline{C}_{\underline{0}}^H \cdot \underline{Z}_{k-1}^H \right) = \\
 & = \left[ \left( \underline{Z}_{k-1} \cdot \underline{C}_{\underline{0}} - \underline{Z}_{k-1} \cdot \underline{C}_{\underline{1}} \right) \cdot \left( \underline{Z}_{k-1} \cdot \underline{C}_{\underline{0}} - \underline{Z}_{k-1} \cdot \underline{C}_{\underline{1}} \right)^H \right] = \\
 & = \left[ \underline{Z}_{k-1} \cdot \left( \underline{C}_{\underline{0}} - \underline{C}_{\underline{1}} \right) \cdot \left( \underline{C}_{\underline{0}} - \underline{C}_{\underline{1}} \right)^H \cdot \underline{Z}_{k-1}^H \right] = \underline{A}_{DIF}
 \end{aligned}$$

Where, taking into account the orthogonal character of the received code-words and the commutative property of the determinant, results identical to the CSI at Rx case with 3dB loss.

## Some examples of differential ST codes


For 1 bit rate only two matrixes  $\Phi = \pm \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}$


With initial  
matrix  $\underline{\underline{D}} = \begin{pmatrix} 1 & -1 \\ 1 & 1 \end{pmatrix}$

BPSK as constellation and rate 0.25 and 2  
antennas, Gain 4

2 bits, 2 antennas, rate 0.5  $\rightarrow$  four matrixes,  
BPSK, Gain 4

$$\Phi = \left\{ \pm \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}, \pm \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix} \right\}$$

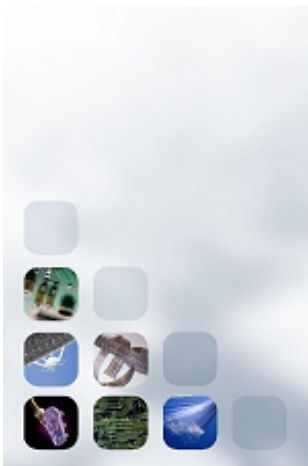

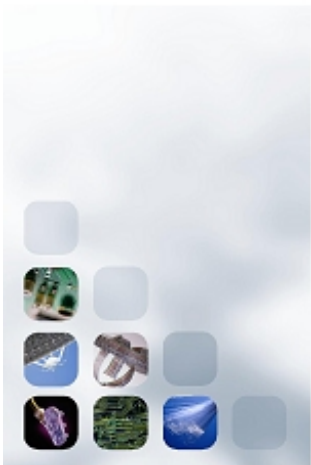

QPSK, 2bits/seg/Hz, 8 codewords, Code gain4,  
Rate 1

$$\Phi = \left\{ \pm \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}, \pm \begin{pmatrix} j & 0 \\ 0 & -j \end{pmatrix}, \pm \begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix}, \pm \begin{pmatrix} 0 & j \\ j & 0 \end{pmatrix} \right\}$$

“quaternion” similar to Alamouti’s code

For higher rates the codewords are formed as:

$$w_Q = \exp(j2\pi / Q)$$


$$\Phi = \left\{ \begin{pmatrix} 0 & w_Q \\ 1 & 0 \end{pmatrix}^m ; m = 0, \dots, Q-1 \right\}$$

Q=8 Rate 2 Gain 1.531 // Q=16 Rate 2.5 Gain 0.7804



## References

- S. Alamouti. A simple transmit diversity technique for wireless communications. IEEE JSAC, Vol. 16, pp. 1451-1458, Oct. 1998.
- V. Tarok, H. Jafarkhani, A.R. Calderbank. Space-time block codes from orthogonal designs. IEEE-IT, Vol. 45, pp. 1456-1467, July 1999.
- G.D. Forney, Geometrically uniform codes. IEEE-IT, Vol. 37, pp. 1241-1260, Sept. 1991.
- B.M. Hochwald, T.L. Marzetta. Unitary space-time modulation for multiple antenna communications in Rayleigh flat fading. IEEE-IT. Also see from the same authors et al. Systematic design of unitary space-time constellations also on IEEE-IT, Vol.46, pp. 543-564, 2000.
- V. Tarok, A. Naguib, N. Seshadri, R. Calderbank. Space-time codes for high data rate wireless communications: Performance criterion and code construction. IEEE-IT, Vol. 44, pp. 744-765, Mar 1998. See also from Tarok and Calderbank papers on IEEE-IT Vol. 45, pp. 1456-1467, July 1999; IEEE-COM Vol. 47, pp. 199-207, Feb 1999.
- B. L. Hughes. Differential Space-Time Modulation. IEEE-IT, Vol. 46, No. 7, pp. 2567- 2578, Nov 2000.



innovating communications

## The Centre Tecnològic de Telecomunicacions de Catalunya

*A gateway to advanced communication technologies*

**Centre Tecnològic de Telecomunicacions de Catalunya**  
Parc Mediterrani de la Tecnologia (PMT)  
Av. Canal Olímpic S/N 08860 – Castelldefels Barcelona (Spain)

Voice: +34 93 645 29 00 :: Fax: +34 93 645 29 01

E-mail: [info@cttc.es](mailto:info@cttc.es) :: Web: <http://www.cttc.es>

## *A compact formulation for two channel access:*

Two data received  $\left[ \underline{\underline{X}}_{R,k-1} \quad \underline{\underline{X}}_{R,k} \right]$

New codeword  $\left[ \underline{\underline{Z}}_{k-1} \quad \underline{\underline{Z}}_{k-1} \cdot \underline{\underline{C}}_k \right] \equiv \underline{\underline{C}}_k$

with

$$\underline{\underline{C}}_k^H \cdot \underline{\underline{C}}_k = \begin{pmatrix} \underline{\underline{I}} & \underline{\underline{C}}_k \\ \underline{\underline{C}}_k^H & \underline{\underline{I}} \end{pmatrix} \quad y \quad \underline{\underline{C}}_k \cdot \underline{\underline{C}}_k^H = 2 \cdot \underline{\underline{I}}$$

Optimum detector for no-CSI at Rx that arrives to the same result

$$Traza \left[ \begin{pmatrix} \underline{\underline{X}}_{R,k-1} & \underline{\underline{X}}_{R,k} \end{pmatrix} \begin{pmatrix} \underline{\underline{I}} & \underline{\underline{C}}_k \\ \underline{\underline{C}}_k^H & \underline{\underline{I}} \end{pmatrix} \begin{pmatrix} \underline{\underline{X}}_{R,k-1}^H \\ \underline{\underline{X}}_{R,k}^H \end{pmatrix} \right] = Traza \left[ \underline{\underline{X}}_{R,k} \underline{\underline{C}}_k^H \underline{\underline{X}}_{R,k-1}^H \right]$$

